

CHAIN LINK FENCING MACHINES

(Chain Link and Fence Making Machines)

1. Chain Link Fencing Machine (Semi Automatic)



FEATURES

- Semi Automatic Machine.
- Cutting and Knuckling by manual process.

SPECIFICATION

Item Code No.	ABM-FM-6930
Mesh Capacity (mm)	25 - 150
Wire gauge	10,12,14,16
Thickness (mm)	2 - 4
Width	As Per Requirement
Production Capacity	8 Rolls per 8 Hours (700-800Kg) (50 mm Mesh of 5' Width x 50' Long Roll)
Power Required (H.P.)	3
Net Weight	400
Gross Weight	700


2. Chain Link Fencing Machine (Automatic)



A chain link fence is a fence "woven" from galvanized steel wire into a mesh or net-type configuration that forms a series of interlocking squares. This woven mesh is referred to as the "fabric" of the fence. It is secured to steel posts embedded in the ground, often used to enclose schoolyards, parking lots, industrial property, tennis courts, baseball fields, and even residential yards. It can also be used to create dog runs, kennels, and animal pens, and is regularly used as a temporary fence to safeguard construction sites.

FEATURES

- Chain link fence is long lasting and weather resistant.
- Chain link fence provides optional security and protection.
- Chain link wire mesh is easily customized for special jobs.
- Chain link fence has great flexibility for variety of applications.
- Chain link fence is available in a variety of dimensions and styles, as suited to your needs.
- Chain link fence is one of the easiest and fastest fences that can be built.

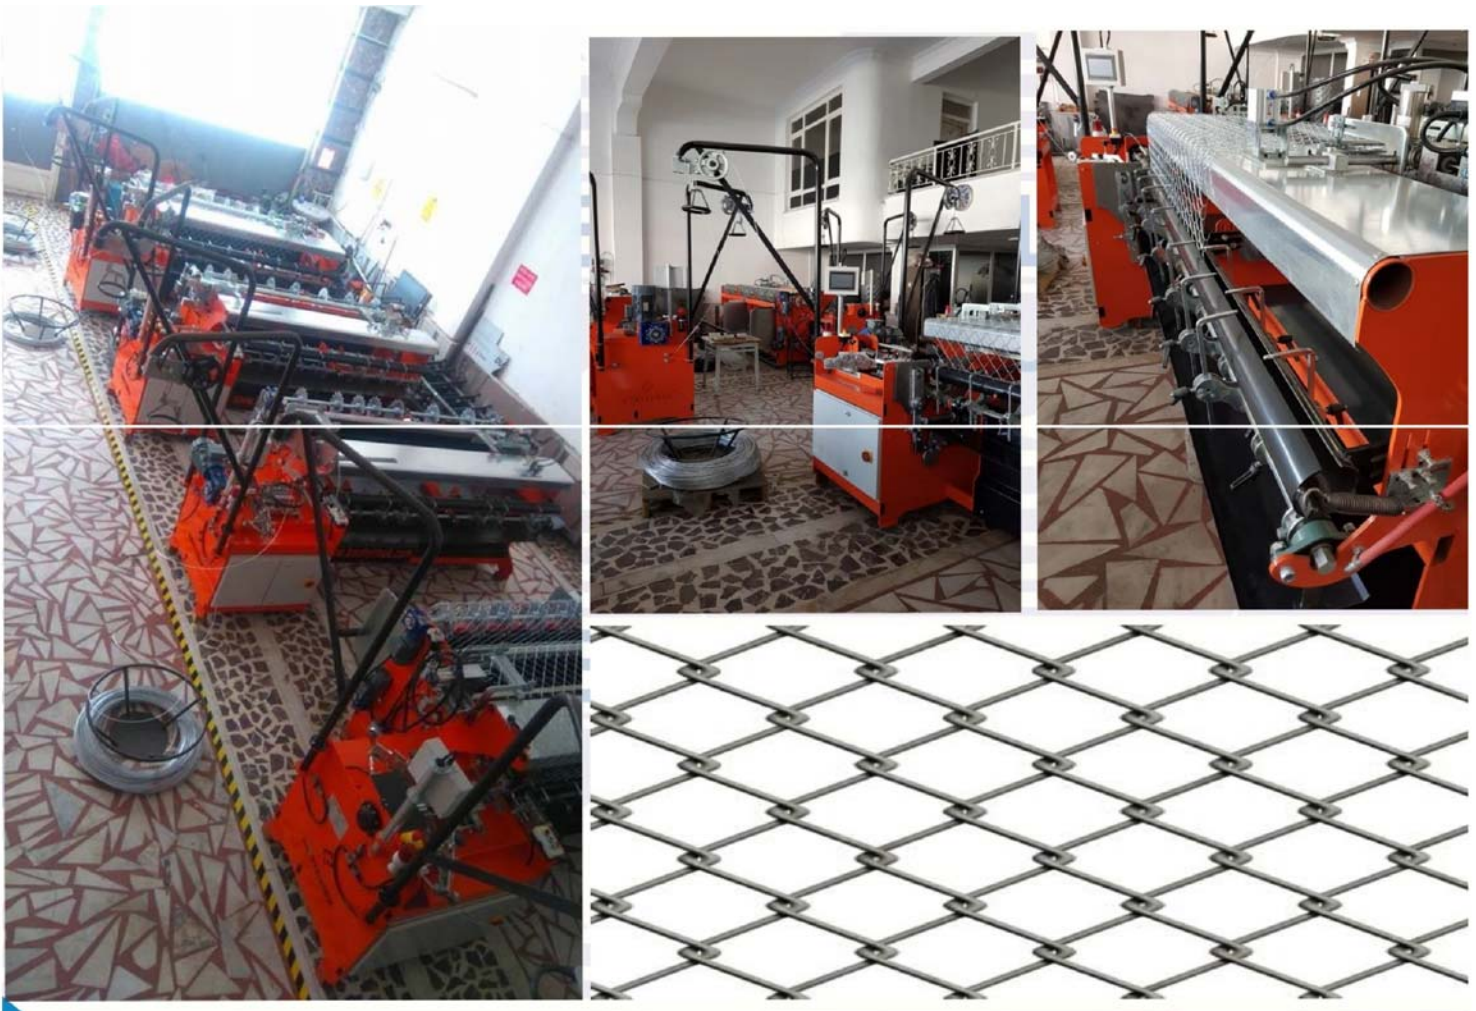





SPECIFICATION

Item Code No.	ABM-FM-212	ABM-FM-212
Mesh Width	2,20 cm	3,20 cm
Wire dia	1,8 mm - 3,2 mm	1,8 mm - 3,2 mm
Eye intervals	35 mm - 80 mm	35 mm - 80 mm
Production Capacity / per hour	250 kg / 150 m ²	250 kg / 150 m ²
Total Power	5,5 kw	6,5 kw
Electric Energy	380V / 50 HZ	380V / 50 HZ
Suitable Wire	Galvanized, PVC Coated Wire	Galvanized, PVC Coated Wire
Number of Molds	3	3
End Close options	straight or auger	straight or auger
Machine weight	1300 kg max	1800 kg max
Machine sizes	350x160 cm	450x160 cm
Control System	Touchscreen 7 "	Touchscreen 7 "

- 24 hour non-stop operation
- Special design to easy use
- High quality with a high production rate
- Double wire entry
- Centering that reduces mold abrasion and wire feeding units
- Plastic mold changing
- Advanced Controls: Manage your wire spacing, RPM, wire sizes, mesh model, end closing model and all settings through an easy-to-use touch screen
- Start / stop buttons in 3 different places on machine
- Written and voice warning at any problem
- Production capacity Control with daily operation performance
- Remote access, update and fault detection via internet connection
- 2 years Guarantee
- Hourly capacity may vary depending on operator performance
- 55x55 mm eye intervals is for 2,5 mm wire dia test
- Technical features are changeable according to models & arge studies.

All Specifications are subject to change towards improvements without any prior notice.

Manufactured by ABM Fasteners (India) and Export Marketing by ABM Tools



Postal Address : 79A, Pocket GG-1, Vikas Puri, New Delhi – 110018, India
 Mobile / Whatsapp : +91 98910 27608 / +91 98712 63436 / + 91 98910 44387
www.abmtools.com
www.abmfasteners.com
 e-mail : abmtools@gmail.com

WEBSITE QR CODE



VIDEO QR CODE

